

N E O LO V12



50 Hz
MATERIAL AISI316


V1237

tablas generales


V1237

ETAPAS	Q (m3/h)	164,80	217,90	243,20	303,10	341,30	369,60	399,50	430,90	460,70	482,20	496,50
	Q (l/seg)	45,78	60,53	67,56	84,19	94,81	102,67	110,97	119,69	127,97	133,94	137,92
	Q (l/min)	2.746,67	3.631,67	4.053,33	5.051,67	5.688,33	6.160,00	6.658,33	7.181,67	7.678,33	8.036,67	8.275,00
	ηh	57,82%	67,21%	70,92%	81,10%	84,62%	85,70%	83,05%	81,59%	79,83%	77,67%	75,91%
1	Hm	50,03	48,19	46,60	44,89	42,98	40,89	37,40	34,35	31,48	29,20	27,65
	KW	38,87	42,59	43,56	45,73	47,25	48,07	49,04	49,45	49,51	49,42	49,30
2	Hm	100,05	96,38	93,20	89,78	85,95	81,78	74,80	68,70	62,95	58,40	55,30
	KW	77,73	85,17	87,12	91,46	94,50	96,14	98,08	98,90	99,03	98,83	98,60
3	Hm	150,08	144,56	139,80	134,66	128,93	122,66	112,20	103,05	94,43	87,60	82,95
	KW	116,60	127,76	130,68	137,19	141,75	144,20	147,12	148,35	148,54	148,25	147,89
4	Hm	200,10	192,75	186,40	179,55	171,90	163,55	149,60	137,40	125,90	116,80	110,60
	KW	155,47	170,35	174,24	182,92	189,00	192,27	196,17	197,81	198,06	197,67	197,19
5	Hm	250,13	240,94	233,00	224,44	214,88	204,44	187,00	171,75	157,38	146,00	138,25
	KW	194,33	212,93	217,80	228,65	236,25	240,34	245,21	247,26	247,57	247,08	246,49
6	Hm	300,15	289,13	279,60	269,33	257,85	245,33	224,40	206,10	188,85	175,20	165,90
	KW	233,20	255,52	261,36	274,38	283,49	288,41	294,25	296,71	297,09	296,50	295,79
7	Hm	350,18	337,31	326,20	314,21	300,83	286,21	261,80	240,45	220,33	204,40	193,55
	KW	272,07	298,11	304,92	320,11	330,74	336,48	343,29	346,16	346,60	345,91	345,09
8	Hm	400,20	385,50	372,80	359,10	343,80	327,10	299,20	274,80	251,80	233,60	221,20
	KW	310,94	340,69	348,49	365,84	377,99	384,54	392,33	395,61	396,12	395,33	394,38
9	Hm	450,23	433,69	419,40	403,99	386,78	367,99	336,60	309,15	283,28	262,80	248,85
	KW	349,80	383,28	392,05	411,57	425,24	432,61	441,37	445,06	445,63	444,75	443,68
10	Hm	500,25	481,88	466,00	448,88	429,75	408,88	374,00	343,50	314,75	292,00	276,50
	KW	388,67	425,86	435,61	457,30	472,49	480,68	490,41	494,52	495,14	494,16	492,98


Curvas según ISO 9906 GRADO 2B - 2920 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

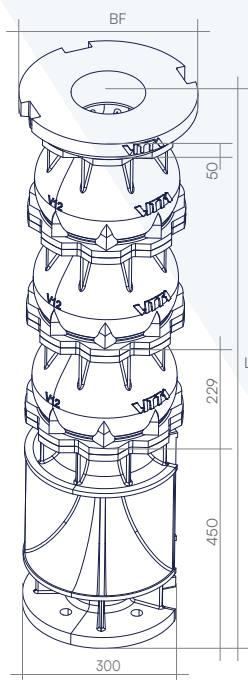


Nº DE ETAPAS	1	2	3	4	5	6	7	8	9	10
L (MM)	729	958	1.187	1.416	1.645	1.874	2.103	2.332	2.561	2.790
PESO (KG)	96	128	161	193	226	258	291	323	356	388

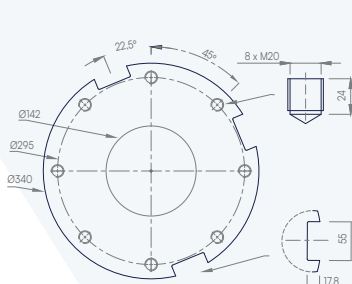




BF **PN10**

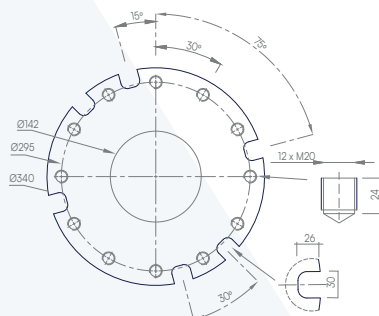

BF **PN16**

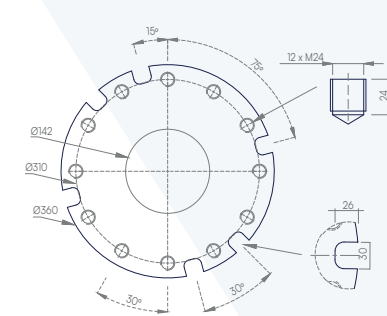

BF **PN25**

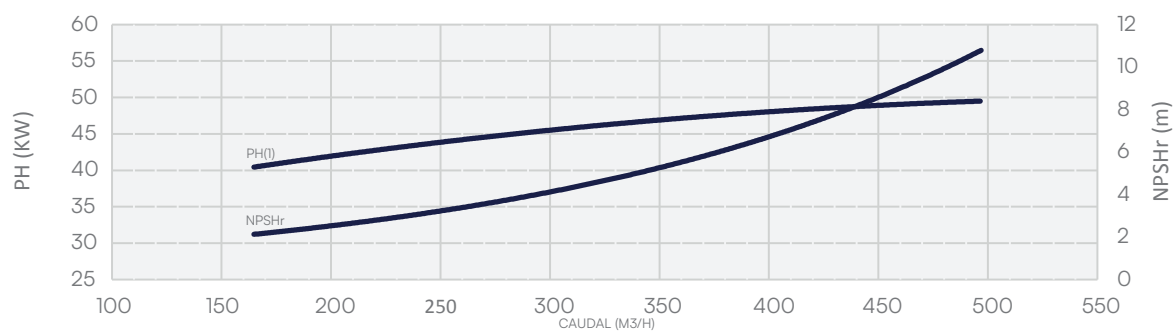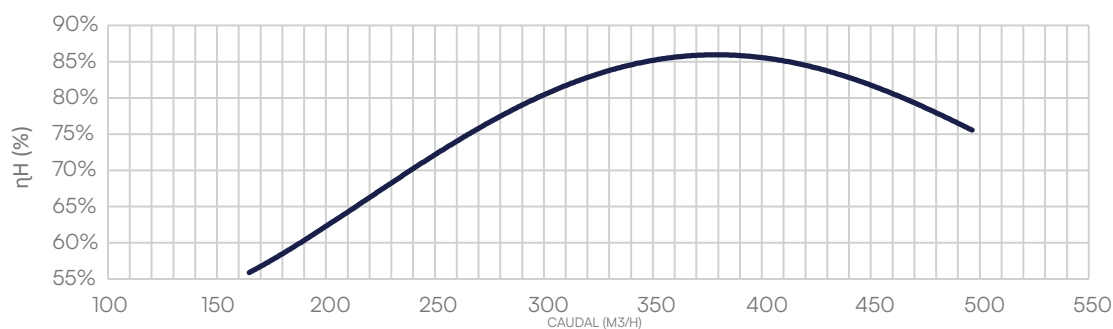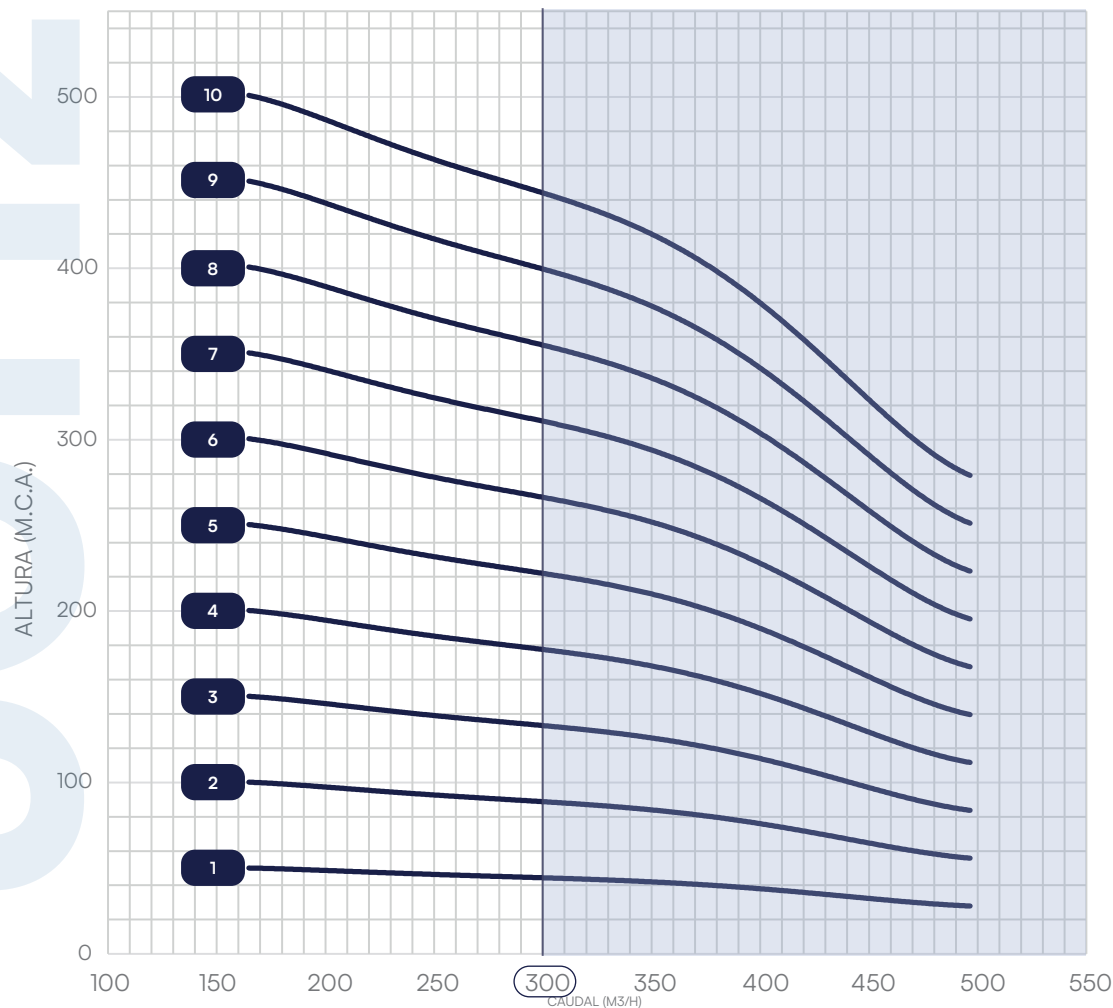



50 Hz
MATERIAL AISI316


V1242

tablas generales


V1242

ETAPAS	Q (m ³ /h)	239,20	271,40	301,70	358,90	388,40	426,70	447,00	479,00	507,70	538,30	570,00
	Q (l/seg)	66,44	75,39	83,81	99,69	107,89	118,53	124,17	133,06	141,03	149,53	158,33
	Q (l/min)	3.986,67	4.523,33	5.028,33	5.981,67	6.473,33	7.111,67	7.450,00	7.983,33	8.461,67	8.971,67	9.500,00
	ηh	64,47%	69,46%	72,20%	80,33%	83,54%	85,70%	85,50%	85,40%	81,98%	75,91%	71,80%
1	Hm	52,41	51,26	50,01	48,87	48,06	45,41	43,80	41,51	38,19	34,07	30,31
	KW	53,01	54,59	56,97	59,52	60,91	61,64	62,42	63,47	64,46	65,86	65,60
2	Hm	104,83	102,51	100,03	97,74	96,11	90,83	87,60	83,03	76,37	68,14	60,63
	KW	106,02	109,19	113,94	119,04	121,81	123,28	124,84	126,95	128,93	131,72	131,20
3	Hm	157,24	153,77	150,04	146,61	144,17	136,24	131,40	124,54	114,56	102,21	90,94
	KW	159,03	163,78	170,91	178,56	182,72	184,91	187,26	190,42	193,39	197,58	196,80
4	Hm	209,66	205,03	200,06	195,49	192,23	181,66	175,20	166,06	152,74	136,29	121,26
	KW	212,04	218,38	227,88	238,08	243,62	246,55	249,68	253,89	257,85	263,44	262,40
5	Hm	262,07	256,29	250,07	244,36	240,29	227,07	219,00	207,57	190,93	170,36	151,57
	KW	265,06	272,97	284,85	297,60	304,53	308,19	312,10	317,36	322,32	329,30	328,01
6	Hm	314,49	307,54	300,08	293,23	288,34	272,49	262,80	249,09	229,11	204,43	181,89
	KW	318,07	327,56	341,82	357,12	365,43	369,83	374,53	380,84	386,78	395,17	393,61
7	Hm	366,90	358,80	350,10	342,10	336,40	317,90	306,60	290,60	267,30	238,50	212,20
	KW	371,08	382,16	398,79	416,64	426,34	431,47	436,95	444,31	451,24	461,03	459,21
8	Hm	419,31	410,06	400,11	390,97	384,46	363,31	350,40	332,11	305,49	272,57	242,51
	KW	424,09	436,75	455,76	476,16	487,24	493,10	499,37	507,78	515,71	526,89	524,81
9	Hm	471,73	461,31	450,12	439,84	432,51	408,73	394,20	373,63	343,67	306,64	272,83
	KW	477,10	491,34	512,72	535,68	548,15	554,74	561,79	571,26	580,17	592,75	590,41
10	Hm	524,14	512,57	500,14	488,71	480,57	454,14	438,00	415,14	381,86	340,71	303,14
	KW	530,11	545,94	569,69	595,20	609,06	616,38	624,21	634,73	644,64	658,61	656,01


Curvas según ISO 9906 GRADO 2B - 2920 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

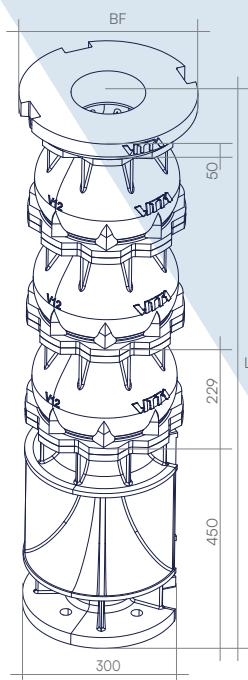


Nº DE ETAPAS	1	2	3	4	5	6	7	8	9	10
L (MM)	729	958	1.187	1.416	1.645	1.874	2.103	2.332	2.561	2.790
PESO (KG)	96	128	161	193	226	258	291	323	356	388

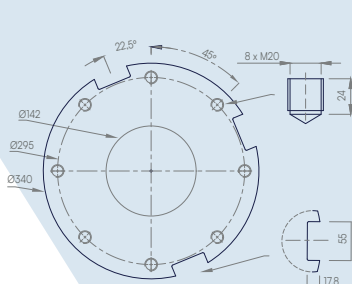

BF PN10

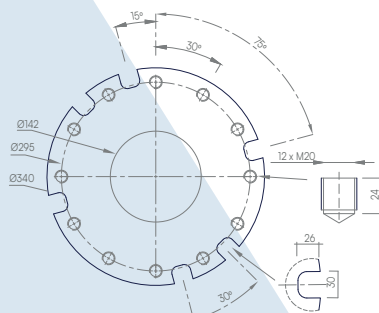

BF PN16

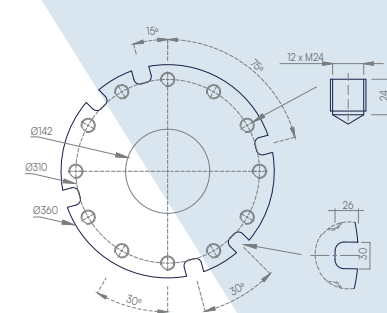

BF PN25

