

N E O V12



60 Hz
MATERIAL AISI316


V1237

tablas generales


V1237

ETAPAS	Q (m ³ /h)	197,76	261,48	291,84	363,72	409,56	443,52	479,40	517,08	552,84	578,64	595,80
	Q (l/seg)	54,93	72,63	81,07	101,03	113,77	123,20	133,17	143,63	153,57	160,73	165,50
	Q (l/min)	3.296,00	4.358,00	4.864,00	6.062,00	6.826,00	7.392,00	7.990,00	8.618,00	9.214,00	9.644,00	9.930,00
	ηh	57,82%	67,21%	70,92%	81,10%	84,62%	85,70%	83,05%	81,59%	79,83%	77,67%	75,91%
1	Hm	72,04	69,39	67,10	64,64	61,88	58,88	53,86	49,46	45,32	42,05	39,82
	KW	67,16	73,59	75,27	79,02	81,65	83,06	84,74	85,45	85,56	85,39	85,19
2	Hm	144,07	138,78	134,21	129,28	123,77	117,76	107,71	98,93	90,65	84,10	79,63
	KW	134,32	147,18	150,55	158,04	163,29	166,12	169,49	170,90	171,12	170,78	170,37
3	Hm	216,11	208,17	201,31	193,91	185,65	176,63	161,57	148,39	135,97	126,14	119,45
	KW	201,49	220,77	225,82	237,07	244,94	249,18	254,23	256,36	256,68	256,17	255,56
4	Hm	288,14	277,56	268,42	258,55	247,54	235,51	215,42	197,86	181,30	168,19	159,26
	KW	268,65	294,36	301,09	316,09	326,59	332,25	338,97	341,81	342,24	341,57	340,75
5	Hm	360,18	346,95	335,52	323,19	309,42	294,39	269,28	247,32	226,62	210,24	199,08
	KW	335,81	367,95	376,36	395,11	408,23	415,31	423,72	427,26	427,80	426,96	425,93
6	Hm	432,22	416,34	402,62	387,83	371,30	353,27	323,14	296,78	271,94	252,29	238,90
	KW	402,97	441,54	451,64	474,13	489,88	498,37	508,46	512,71	513,37	512,35	511,12
7	Hm	504,25	485,73	469,73	452,47	433,19	412,15	376,99	346,25	317,27	294,34	278,71
	KW	470,13	515,13	526,91	553,15	571,52	581,43	593,20	598,17	598,93	597,74	596,31
8	Hm	576,29	555,12	536,83	517,10	495,07	471,02	430,85	395,71	362,59	336,38	318,53
	KW	537,30	588,72	602,18	632,18	653,17	664,49	677,95	683,62	684,49	683,13	681,50
9	Hm	648,32	624,51	603,94	581,74	556,96	529,90	484,70	445,18	407,92	378,43	358,34
	KW	604,46	662,30	677,46	711,20	734,82	747,55	762,69	769,07	770,05	768,52	766,68
10	Hm	720,36	693,90	671,04	646,38	618,84	588,78	538,56	494,64	453,24	420,48	398,16
	KW	671,62	735,89	752,73	790,22	816,46	830,61	847,44	854,52	855,61	853,91	851,87


Curvas según ISO 9906 GRADO 2B - 3504 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

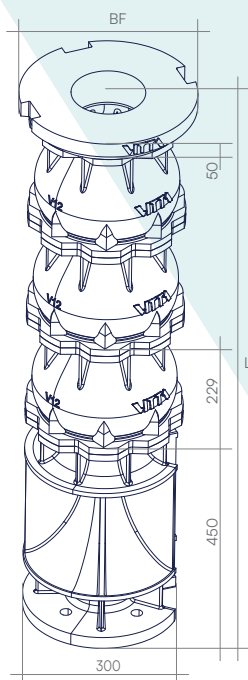


Nº DE ETAPAS	1	2	3	4	5	6	7	8	9	10
L (MM)	729	958	1.187	1.416	1.645	1.874	2.103	2.332	2.561	2.790
PESO (KG)	96	128	161	193	226	258	291	323	356	388

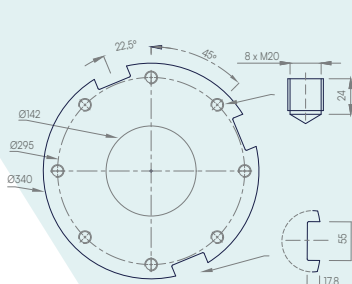

BF **PN10**

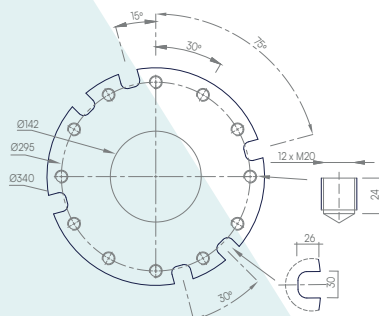




BF **PN16**

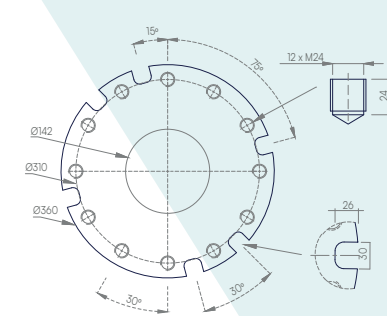

BF **PN25**



Curvas según ISO 9906 GRADO 2B - 3504 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

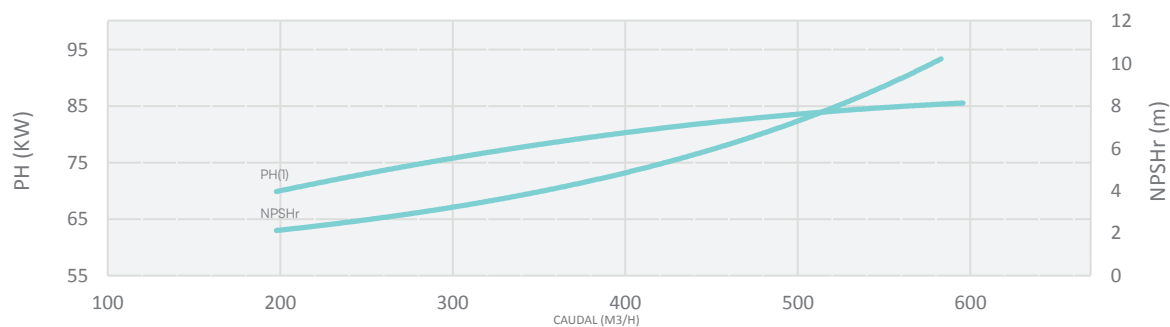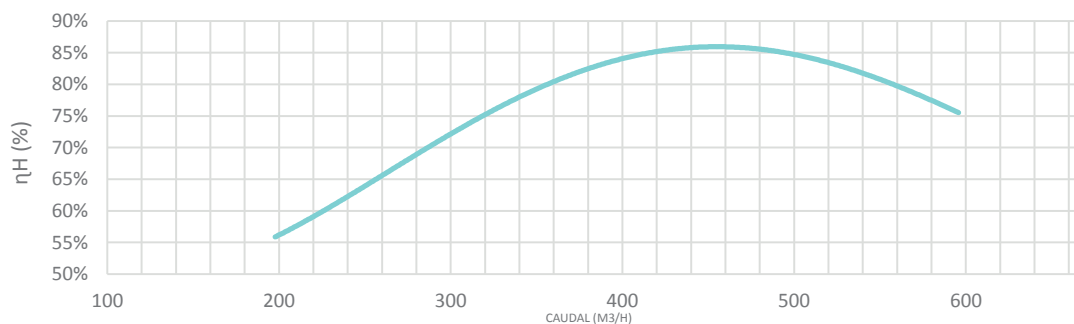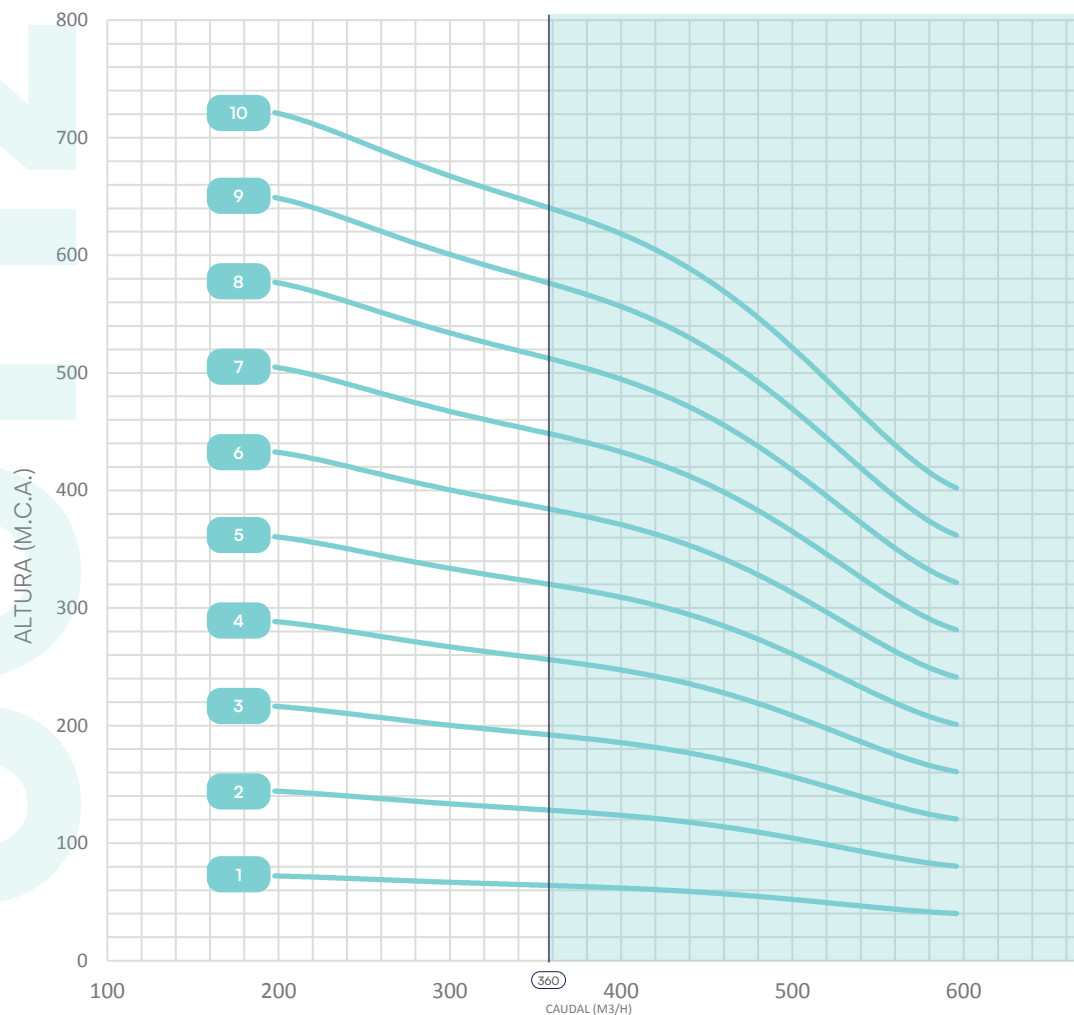



60 Hz
MATERIAL AISI316


V1242

tablas generales


V1242

ETAPAS	Q (m ³ /h)	287,04	325,68	362,04	430,68	466,08	512,04	536,40	574,80	609,24	645,96	684,00
	Q (l/seg)	79,73	90,47	100,57	119,63	129,47	142,23	149,00	159,67	169,23	179,43	190,00
	Q (l/min)	4.784	5.428	6.034	7.178	7.768	8.534	8.940	9.580	10.154	10.766	11.400
	ηh	64,47%	69,46%	72,20%	80,33%	83,54%	85,70%	85,50%	85,40%	81,98%	75,91%	71,80%
1	Hm	75,48	73,81	72,02	70,37	69,20	65,40	63,07	59,78	54,99	49,06	43,65
	KW	91,60	94,34	98,44	102,85	105,24	106,51	107,86	109,68	111,39	113,81	113,36
2	Hm	150,95	147,62	144,04	140,75	138,40	130,79	126,14	119,56	109,97	98,13	87,31
	KW	183,21	188,68	196,89	205,70	210,49	213,02	215,73	219,36	222,79	227,62	226,72
3	Hm	226,43	221,43	216,06	211,12	207,61	196,19	189,22	179,34	164,96	147,19	130,96
	KW	274,81	283,01	295,33	308,55	315,73	319,53	323,59	329,04	334,18	341,42	340,08
4	Hm	301,91	295,24	288,08	281,50	276,81	261,59	252,29	239,12	219,95	196,25	174,61
	KW	366,41	377,35	393,77	411,40	420,98	426,04	431,45	438,73	445,57	455,23	453,43
5	Hm	377,38	369,05	360,10	351,87	346,01	326,98	315,36	298,90	274,94	245,31	218,26
	KW	458,02	471,69	492,22	514,25	526,22	532,55	539,32	548,41	556,97	569,04	566,79
6	Hm	452,86	442,86	432,12	422,25	415,21	392,38	378,43	358,68	329,92	294,38	261,92
	KW	549,62	566,03	590,66	617,11	631,47	639,06	647,18	658,09	668,36	682,85	680,15
7	Hm	528,34	516,67	504,14	492,62	484,42	457,78	441,50	418,46	384,91	343,44	305,57
	KW	641,22	660,37	689,10	719,96	736,71	745,57	755,04	767,77	779,75	796,65	793,51
8	Hm	603,81	590,48	576,16	563,00	553,62	523,17	504,58	478,24	439,90	392,50	349,22
	KW	732,83	754,70	787,54	822,81	841,96	852,08	862,91	877,45	891,14	910,46	906,87
9	Hm	679,29	664,29	648,18	633,37	622,82	588,57	567,65	538,02	494,89	441,56	392,87
	KW	824,43	849,04	885,99	925,66	947,20	958,59	970,77	987,13	1002,54	1024,27	1020,23
10	Hm	754,77	738,10	720,20	703,75	692,02	653,97	630,72	597,81	549,87	490,63	436,53
	KW	916,03	943,38	984,43	1028,51	1052,45	1065,10	1078,63	1096,81	1113,93	1138,08	1133,59


Curvas según ISO 9906 GRADO 2B - 3504 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

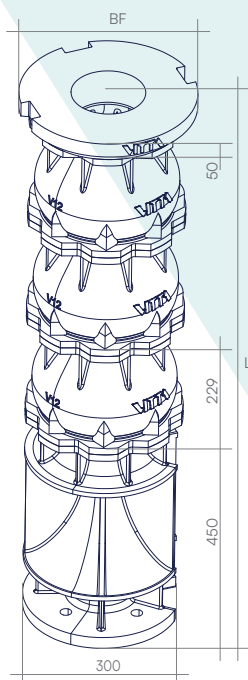


Nº DE ETAPAS	1	2	3	4	5	6	7	8	9	10
L (MM)	729	958	1.187	1.416	1.645	1.874	2.103	2.332	2.561	2.790
PESO (KG)	96	128	161	193	226	258	291	323	356	388

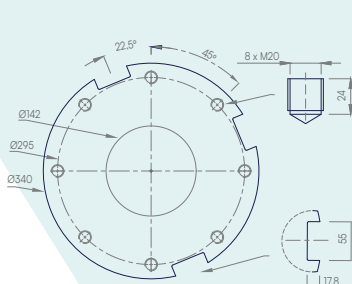

BF **PN10**

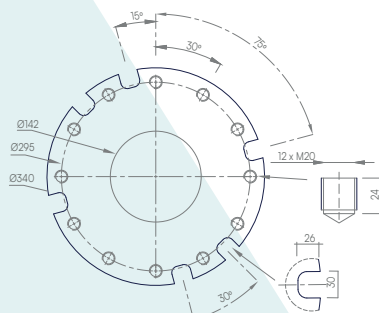

BF **PN16**

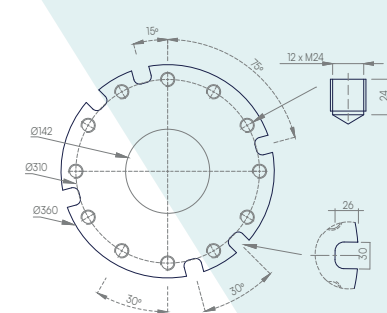

BF **PN25**



Curvas según ISO 9906 GRADO 2B - 3504 rpm - Válidas para agua limpia a 20°C, con densidad de 1.0 kg/dm³ y viscosidad cinemática de 1 mm²/s

